



TRUTEK™
CONSTRUCTION FASTENING SYSTEMS

PRODUCT CATALOGUE





ABOUT TRUTEK	4
PRODUCT SELECTOR	5
GAS & PAT TECHNOLOGY	6 - 10
MECHANICAL ANCHORS	11 - 18
CHEMICAL & ACCESSORIES	20 - 24
LIGHTWEIGHT ANCHORS	25 - 31
INSULATION ANCHORS	32 - 34
CARBIDE DRILLING	35 - 36
ABRASIVE & DIAMOND DISCS	37
TRUTEK BRANDING	38
TRUTEK POWER TOOLS	39

WHO ARE WE?

Trutek Fasteners is a part of an international holding group that includes production and trading companies operating in all parts of the world. Its distribution activity in Europe began in the United Kingdom in January 2002. Our company specialises in the production of top quality fastening systems for construction and industry. In our wide range, you will find both traditional products, used for many years in construction industry, and innovative, technologically advanced solutions that guarantee the highest level of safety, as well as easy and prompt application.

TOP QUALITY OF PRODUCTS - TECHNICAL APPROVALS, CERTIFICATES AND TESTS

Our products are subject to strict and demanding quality control that ensures the highest quality of the products and complete safety of their use. This is confirmed by numerous certificates and technical approvals.

FAST AND COMPLETE DELIVERIES

- Stock on hand. Advanced SAP computer system enables us to manage warehouse stock accurately and prevent product shortage.
- Prompt order execution. Orders from our Customers, regardless of the way of their submission, are immediately passed on for execution, so we guarantee delivery within 24 hours from ordering.
- Complete delivery information. The integration of our computer system with the shipment system of the forwarding company makes it possible to track the process of shipment online and predict the time of delivery.
- Delivery completeness. The process of the execution of orders involves checking mechanisms that provide multi-level inspection of delivery completeness, thus limiting possible mistakes.

TRAINING

Comprehensive program of trainings for our Commercial Partners is aimed to the best preparation of their personnel to serve Customers from the construction industry. The training program includes the following issues:

- Product training - it gives the opportunity to get fully familiar with our products, their technical characteristics and application in construction site conditions.
- Technical training - it includes expertise in the range of materials science, physical and chemical processes that occur during anchoring and product documentation required on construction sites, such as technical approvals, certificates and declarations of conformity.

TECHNICAL ASSISTANCE, ADVISING ON CONSTRUCTION SITES

Technical assistance is provided by a group of experts whose mission is to support design engineers and constructors in cases of innovative and difficult construction projects, as well as the optimum and complex choice of fastenings for typical applications that are common for constructions sites:

- telephone info-line technical support,
- choice of fastenings for a given project,
- anchors choice reports,
- materials for design engineers,
- anchors choice program,
- construction site test and presentations

ORDER PORTAL - ONLINE ORDERING

This is easy and fast way for purchasing at any time of the day and night. All the orders placed on the Internet retain all commercial conditions, and the interactive interface of information exchange gives the opportunity to agree non-standard conditions of product delivery.

- information on the availability of product of interest,
- information on the order value,
- information on the order processing progress;
- invoice prior to product delivery,
- special offers for web portal users,
- historical data review,
- waybill number, enabling the Customer to track the process of goods delivery

DESCRIPTION

- Full Application
- Limited Use
- ◆ Technical approval

Pg Product MECHANICAL ANCHORS

- 11 HD - Heavy Duty Anchors
- 12 - 13 TX and TT - Throughbolts
- 14 - 15 TAB - Concrete Bolts
- 16 TS - Sleeve Anchors
- 17 TSA - Shield Anchors
- 18 TDX - Drop-In Anchors

CHEMICAL ANCHORS

- 20 - 21 TCM - Chemical Cartridge Anchors
- 22 TCS - Chemical Capsule Anchors

LIGHTWEIGHT ANCHORS

- 25 TNP - Nylon Plugs
- 25 - 26 THS - Nylon Hammerscrews
- 26 TSRB TNP L - Scaffold ring with plug
- 27 TSF - Sanitary Fixings
- 27 TNFA - Nylon Frame Long expansion
- 28 TNFAM - Multi Expansion Frame Anchor
- 29 TFCS - Door/Window Frame Screw
- 29 TKS - Tapscrew
- 30 TZh Zamac Hammer-In Anchor
- 30 TMH - All Steel Hammer-In Anchor
- 30 TME - Aerated Concrete express
- 30 TWH - Wirehangers
- 31 TDPA - Metal Plasterboard Anchor
- 31 TNPA - Nylon Plasterboard Anchor
- 31 TMS - All Purpose Screw Multifix
- 31 THW - Hollow Wall Anchors

	BASE MATERIAL								FASTENING TYPE						
	Concrete	Stone/Rock	Brickwork (Solid)	Brickwork (Perforated)	Hollow Block	Aerated Concrete Block	Plasterboard	Steel	Wood	Torque Controlled	Hammerset	Chemical	Others	ITB Approval	ETA Approval
11	■	■								✓					◆
12 - 13	■	■								✓				◆	◆
14 - 15	■	■										✓			◆
16	■	■	■							✓				◆	
17	■	■	■		■							✓		◆	
18	■	■								✓				◆	◆
20 - 21	■	■	■	■	■	●					✓			◆	◆
22	■	■	●								✓				◆
25	■	■	■	●	●	●				✓					
25 - 26	■	■	■	●	●	●				✓					
26	■	■	■	■	●	●						✓			
27	■	■	■	●	●	●				✓					
27	■	■	■	●	●	●				✓					
28	■	■	■	■	■	●				✓					◆
29	■	■	■									✓			
29	■	■	■									✓			
30	■	■	■	●	●					✓					
30	■	■								✓					◆
30						■						✓			
30	■	■			●							✓			
31							■	■				✓			
31								■	■			✓			
31	■	■	■	●	●	■						✓			
31								■	■			✓			





GAS NAILER TGT C38

(TOOL SUPPLIED COMPLETE IN A PACKING CASE)



Product Code	Energy Level (J)	Magazine Capacity (pcs)	Nail Length (mm)	Tool Weight (kg)	Gas Capacity	Battery Life
TGT C38	90	30 or 40	13 - 40	3.9	1200 shots	4000 shots



Premium Magazine Nails for Gas Nailer (fixing in concrete and Steel)

Product Code	Base Material	Nail Diameter (mm)	Nail Length (mm)	For use with	Box Packing	Outer Packing
TGT15P	Steel	3.0/2.6	15	TGT C38	1000	5000
TGT19P	Steel	3.0/2.6	19	TGT C38	1000	5000
TGT22P	Steel/Concrete/Brick	3.0/2.6	22	TGT C38	1000	5000
TGT25P	Steel/Concrete/Brick	3.0/2.6	25	TGT C38	1000	5000
TGT32P	Steel/Concrete/Brick	3.0/2.6	32	TGT C38	1000	5000
TGT38P	Steel/Concrete/Brick	3.0/2.6	38	TGT C38	1000	5000



Premium Magazine Nails for For Gas Nailer C5 (fixing in concrete and Steel)

Product Code	Base Material	Nail Diameter (mm)	Nail Length (mm)	For use with	Box Packing	Outer Packing
TGT17C	Steel	3.0/2.6	17	DeWalt C5	800	4000
TGT19C	Steel	3.0/2.6	19	DeWalt C5	800	4000
TGT22C	Steel/Concrete/Brick	3.0/2.6	22	DeWalt C5	800	4000
TGT27C	Steel/Concrete/Brick	3.0/2.6	27	DeWalt C5	800	4000
TGT32C	Steel/Concrete/Brick	3.0/2.6	32	DeWalt C5	800	4000
TGT38C	Steel/Concrete/Brick	3.0/2.6	38	DeWalt C5	800	4000



Steel washer & Magnet for Gas Nailer

Product Code	Description	Washer Diameter (mm)	Box Packing	Outer Packing
TGA825MW	Steel washer for Gas Tool	25	200	3600
TGT100-104	Magnet for Gas Tool	25	-	-



Gas for Nail Guns

Product Code	Description	Fuel Cell Capacity (ml)	Weight of Fuel Cell (g)	For use with	Box Packing	Outer Packing
TGC165S	Gas for Gas Tools/Standard	80	40	C38/IS200	20	100

GAS NAILER TGT IS200

(TOOL SUPPLIED COMPLETE IN A PACKING CASE)



Product Code	Energy Level (J)	Magazine Capacity (pcs)	Insulation Thickness (mm)	Tool Weight (kg)	Gas Capacity	Battery Life
TGT IS200	90	-	25 - 200	3.3	800 shots	4000 shots



Insulation Anchor for Styrofoam & hard Rockwool (60 mm collar)

Product Code	Type of Substrate Material	Insulation Thickness (mm)	Nail Length	Box Packing	Outer Packing
TIF60050	Concrete/Steel/Brick	50	52	500	16000
TIF60060	Concrete/Steel/Brick	60	52	500	16000
TIF60070	Concrete/Steel/Brick	70	52	500	16000
TIF60080	Concrete/Steel/Brick	80	52	500	16 000
TIF60100	Concrete/Steel/Brick	100	52	450	14 400
TIF60120	Concrete/Steel/Brick	120	52	400	12 800
TIF60140	Concrete/Steel/Brick	140	52	300	9 600
TIF60150	Concrete/Steel/Brick	150	52	300	9 600
TIF60160	Concrete/Steel/Brick	160	52	250	8 000
TIF60180	Concrete/Steel/Brick	180	52	250	8 000
TIF60200	Concrete/Steel/Brick	200	52	200	6 400



Suitable for: Trutek TGT IS200 and LV600M

Insulation Anchor for soft Rockwool Fixing (90 mm collar)

Product Code	Type of Substrate Material	Insulation Thickness (mm)	Nail Length	Box Packing	Outer Packing
TIF90080	Concrete/Steel/Brick	80	52	250	8 000
TIF90100	Concrete/Steel/Brick	100	52	250	8 000
TIF90120	Concrete/Steel/Brick	120	52	200	6 400
TIF90140	Concrete/Steel/Brick	140	52	200	6 400
TIF90150	Concrete/Steel/Brick	150	52	150	4 800
TIF90160	Concrete/Steel/Brick	160	52	150	4 800
TIF90180	Concrete/Steel/Brick	180	52	100	3 200
TIF90200	Concrete/Steel/Brick	200	52	100	3 200



Suitable for: Trutek TGT IS200



POWDER ACTUATED TOOLS



LV350

Product Code	Cartridge Calibre	Head Diameter (mm)	Tool Weight (kg)	Magazine Nail Length/Single (mm)	Tool Length
LV350	6.8/11 (Strip)	8	2,35	- / 16-62	340



Magazine cartridges - Calibre 6.8/11 mm

Product Code	Cartridge Calibre	Colour	Power of Cartridge	Box Packing	Outer Packing
TCGM	6.8/11	Green	Weak	100	10000
TCYM	6.8/11	Yellow	Average	100	10000
TCRM	6.8/11	Red	Strong	100	10000
TCBM	6.8/11	Black	Very Strong	100	10000



Suitable for: LV350, DX5 and DX460



Coming January 2023

LV500M

Product Code	Cartridge Calibre	Head Diameter (mm)	Tool Weight (kg)	Magazine Nail Length/Single (mm)	Tool Length
LV500M	6.8/11 (Strip)	8	3.2	16-72 / 16-62	450

TD Drive Pins 8/9 mm Plastic Washer

Product Code	Nail Diameter (mm)	Nail Length (mm)	Type of Substrate	Box Packing	Outer Packing
TD16K	3.8	16	Steel	100	2000
TD19K	3.8	19	Steel	100	2000
TD22K	3.8	22	Steel	100	2000
TD27	3.8	27	Steel/Concrete/Brick	100	2000
TD32	3.8	32	Steel/Concrete/Brick	100	2000
TD37	3.8	37	Steel/Concrete/Brick	100	2000
TD42	3.8	42	Steel/Concrete/Brick	100	2000
TD47	3.8	47	Steel/Concrete/Brick	100	2000
TD52	3.8	52	Steel/Concrete/Brick	100	1000
TD57	3.8	57	Steel/Concrete/Brick	100	1000
TD62	3.8	62	Steel/Concrete/Brick	100	1000
TD72	3.8	72	Steel/Concrete/Brick	100	1000
TD82	3.8	82	Steel/Concrete/Brick	100	1000
TD97	3.8	97	Steel/Concrete/Brick	100	1000
TH19**	3.8	19	Steel	100	5000

** Top Hat Pin for metal sheet fastening



NEW



Suitable for: LV350, DX5 and DX460

TD Drive Pins 23 mm Metal Washer

Product Code	Nail Diameter (mm)	Nail Length (mm)	Type of Substrate	Washer Diameter (mm)	Box Packing	Outer Packing
TMWP27	3.8	27	Steel/Concrete	23	100	1500
TMWP32	3.8	32	Steel/Concrete	23	100	1500
TMWP47	3.8	47	Steel/Concrete	23	100	1500



Suitable for: LV350, DX5 and DX460

TDM Magazine Drive Pins

Product Code	Nail Diameter (mm)	Nail Length (mm)	Type of Substrate	Box Packing	Outer Packing
TDM16K	3.8	16	Steel	100	2000
TDM19K	3.8	19	Steel	100	2000
TDM22K	3.8	22	Steel	100	2000
TDM27	3.8	27	Steel/Concrete/Brick	100	2000
TDM32	3.8	32	Steel/Concrete/Brick	100	2000
TDM37	3.8	37	Steel/Concrete/Brick	100	2000
TDM42	3.8	42	Steel/Concrete/Brick	100	2000
TDM47	3.8	47	Steel/Concrete/Brick	100	2000
TDM52	3.8	52	Steel/Concrete/Brick	100	1000
TDM57	3.8	57	Steel/Concrete/Brick	100	1000
TDM62	3.8	62	Steel/Concrete/Brick	100	1000
TDM72	3.8	72	Steel/Concrete/Brick	100	1000



Suitable for: DX5 and DX460

TXCC Ceiling Anchor

(Suspension Clip suitable for 8mm Cartridge Tools)

Product Code	Shank Diameter (mm)	Nail Length (mm)	Box Packing	Outer Packing
TXCC32	3.8	32	100	2000



Suitable for: LV350, DX5 and DX460

TCC Conduit Clips

(Conduit Clip suitable for 8mm Cartridge Tools or TGTC38 Gas tool)

Product Code	Pipe/Cable Diameter (mm)	Hole Size (mm)	Box Packing	Outer Packing
TCC16	16	6	50	1000
TCC20	20	6	50	1000



NEW

Suitable for: LV350, LV600, TGTC38



LV600M

Product Code	Cartridge Calibre	Head Diameter (mm)	Tool Weight (kg)	Magazine Nail Length/Single (mm)	Tool Length
LV600M	6.3/10 (Disk)	8	3,2	16-62/ 16-72	460



Product Code	Description
LV60005	Rubber Spring (damper for use with LV 600)
LV60020M9	Kit (magazine + nail guide) - 9mm (9mm barrel suitable for SPIT nails)
LV60017	Pin guide set for Insulation Anchors



TC...M Magazine Nails - (9mm Hd)

Product Code	Head/Nail Diameter (mm)	Nail Length (mm)	Type of Substrate	Box Packing	Outer Packing
TC15M	9/3.7	15	Steel	500	2500
TC20M	9/3.7	20	Steel/Concrete/Brick	500	2500
TC25M	9/3.7	25	Steel/Concrete/Brick	500	2500
TC30M	9/3.7	30	Steel/Concrete/Brick	500	2500
TC35M	9/3.7	35	Steel/Concrete/Brick	500	2500
TC40M	9/3.7	40	Steel/Concrete/Brick	300	1500
TC50M	9/3.7	50	Steel/Concrete/Brick	300	1500
TC60M	9/3.7	60	Steel/Concrete/Brick	300	1500



Suitable for: Trutek LV600M, SPIT P370



TC Nails with Plastic Washer - (9mm Hd)

Product Code	Head/Nail Diameter (mm)	Nail Length (mm)	Type of Substrate	Box Packing	Outer Packing
TC15	9/3.7	15	Steel	100	2000
TC20	9/3.7	20	Steel/Concrete	100	2000
TC25	9/3.7	25	Steel/Concrete/Brick	100	2000
TC30	9/3.7	30	Steel/Concrete/Brick	100	2000
TC35	9/3.7	35	Steel/Concrete/Brick	100	2000
TC40	9/3.7	40	Steel/Concrete/Brick	100	2000
TC50	9/3.7	50	Steel/Concrete/Brick	100	2000
TC60	9/3.7	60	Steel/Concrete/Brick	100	1000
TC70	9/3.7	70	Steel/Concrete/Brick	100	1000
TC80	9/3.7	80	Steel/Concrete/Brick	100	1000
TC90	9/3.7	90	Steel/Concrete/Brick	100	1000



Suitable for: Trutek LV600M, SPIT P370



Magazine Cartridges - Disk - Calibre 6.3/10 mm

Product Code	Cartridge Calibre	Colour	Power of Cartridge	Box Packing	Outer Packing
TDL10CY	6.3/10	Yellow	Strong	100	10000
TDL10CG	6.3/10	Green	Medium	100	10000
TDL10CR	6.3/10	Red	Very strong	100	10000



Suitable for: TRUTEK LV600M, SPIT P370

HDLM Anchor for Extreme Heavy Loads - Bolt (Steel White Zinc Plated)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing
HDLM 10/10	10	75	10	65	50
HDLM 10/30	10	95	30	65	50
HDLM 10/50	10	115	50	65	50
HDLM 12/10	12	87	10	80	50
HDLM 12/30	12	107	30	80	50
HDLM 12/50	12	127	50	80	25
HDLM 15/15	15	108	15	95	25
HDLM 15/25	15	118	25	95	25
HDLM 15/45	15	138	45	95	25
HDLM 18/10	18	117	10	105	20
HDLM 18/20	18	127	20	105	20
HDLM 18/40	18	147	40	105	20
HDLM 24/20	24	152	20	130	10
HDLM 24/50	24	182	50	130	10
HDLM 28/10**	28	172	10	160	10
HDLM 28/30**	28	192	30	160	10
HDLM 28/60**	28	222	60	160	5



**Available on Request.

HDPM Anchor for Extreme Heavy Loads - Nut (Steel White Zinc Plated)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing
HDPM 10/10	10	77	10	65	50
HDPM 10/30	10	97	30	65	50
HDPM 10/50	10	117	50	65	50
HDPM 12/10	12	90	10	80	50
HDPM 12/30	12	110	30	80	50
HDPM 12/50	12	130	50	80	25
HDPM 15/15	15	111	15	95	25
HDPM 15/25	15	121	25	95	25
HDPM 15/45	15	141	45	95	25
HDPM 18/10	18	122	10	105	20
HDPM 18/20	18	132	20	105	20
HDPM 18/40	18	152	40	105	20
HDPM 24/20	24	157	20	130	10
HDPM 24/50	24	187	50	130	10
HDPM 28/10	28	181	10	160	10
HDPM 28/30	28	201	30	160	10
HDPM 28/60	28	231	60	160	5



Extreme Heavy Loads HDF Anchor - Countersunk Head (Steel White Zinc Plated)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing
HDF12/10**	12	80	10	80	50
HDF12/25**	12	95	25	80	50
HDF15/10**	15	95	10	95	25
HDF15/25**	15	110	25	95	25
HDF18/20**	18	115	20	105	20
HDF18/40**	18	135	40	105	20



**Available on Request.

A4-316 Stainless Steel Available on Request**



NEW



Throughbolt Anchor ETA Option 1 – Crack Approved (Steel White Zinc Plated, St/St Clip)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TX08060**	8	60	5	45	100	400
TX08075	8	75	10	55	100	400
TX08095	8	95	30	55	100	400
TX08115	8	115	50	55	50	200
TX10085	10	85	15	60	50	200
TX10105	10	105	35	60	50	200
TX10120	10	120	50	60	50	200
TX10140	10	140	70	60	50	200
TX12090**	12	90	15	60	50	200
TX12100	12	100	5	80	50	200
TX12125	12	125	30	80	50	200
TX12140	12	140	45	80	25	100
TX12175	12	175	80	80	25	100
TX16115**	16	115	15	80	25	100
TX16150	16	150	30	100	25	100

** Not included in the ETA approval



NEW



Throughbolt Anchor ETA Option 1 – Crack Approved (Stainless Steel A4-316)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing
TX08075SS	8	75	10	45	100
TX08085SS	8	85	20	55	100
TX08095SS	8	95	30	55	100
TX08115SS	8	115	50	55	50
TX10090SS	10	90	20	60	50
TX10105SS	10	105	35	60	50
TX10120SS	10	120	50	60	50
TX12090SS**	12	90	15	60	50
TX12100SS	12	100	5	80	50
TX12110SS	12	110	15	80	50
TX12125SS	12	125	30	80	50
TX12140SS	12	140	45	80	25
TX16090SS**	16	90	-	80	25
TX16115SS**	16	115	15	80	25
TX16145SS	16	145	25	100	25
TX16175SS	16	175	55	100	25

** Not included in the ETA approval

Throughbolt Anchor ETA option 7 - Non-Crack Approved (Steel Hot Dipped Galvanized)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TT08050G**	8	50	5	45	200	800
TT08060G	8	60	20	55	100	400
TT08080G	8	80	35	55	100	400
TT08090G	8	90	45	55	100	400
TT08115G	8	115	60	55	100	400
TT10065G	10	65	8	60	100	400
TT10090G	10	90	33	60	50	200
TT10105G	10	105	48	60	50	200
TT10120G	10	120	63	60	50	200
TT10140G	10	140	83	60	50	200
TT12080G	12	80	12	75	50	200
TT12100G	12	100	25	75	50	200
TT12120G	12	120	45	75	25	100
TT12140G	12	140	65	75	25	100
TT12180G	12	180	105	75	25	100
TT16105G	16	105	10	90	25	100
TT16125G	16	125	21	100	20	80
TT16150G	16	150	56	100	20	80



NEW



Throughbolt Anchor - Option 7 Non-Crack Approved (Steel White Zinc Plated)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TT06045**	6	45	-	50	250	1000
TT06055**	6	55	-	50	250	1000
TT06085**	6	85	32	50	200	800
TT08050**	8	50	-	60	200	800
TT08065	8	65	7	60	100	400
TT08080	8	80	22	60	100	400
TT08090	8	90	32	60	100	400
TT08100	8	100	42	60	100	400
TT08115	8	115	57	60	100	400
TT08130	8	130	72	60	50	200
TT10065**	10	65	-	65	100	400
TT10075	10	75	-	65	100	400
TT10090	10	90	16	65	50	200
TT10105	10	105	31	65	50	200
TT10120	10	120	46	65	50	200
TT10140	10	140	66	65	50	200
TT12080	12	80	-	90	50	200
TT12100	12	100	-	90	50	200
TT12120	12	120	20	90	25	100
TT12140	12	140	40	90	25	100
TT12180	12	180	80	90	25	100
TT12200	12	200	100	90	25	100
TT12220	12	220	120	90	25	100
TT12240	12	240	140	90	25	100
TT16105	16	105	-	110	20	80
TT16125	16	125	-	110	20	80
TT16150	16	150	24	110	20	80
TT16175	16	175	49	110	20	80
TT16200	16	200	74	110	20	80
TT16220	16	220	94	110	15	60
TT16240	16	240	114	110	10	40
TT20130	20	130	-	120	15	60
TT20160	20	160	-	120	10	40
TT20220	20	220	-	120	10	40
TT20240	20	240	-	120	5	20
TT24180**	24	180	-	130	10	40
TT24260**	24	260	-	130	5	20



** Non ETA products, ITB certification only.





Anchor Bolt for Concrete Hex Flange Head Option 7 - Non Crack Approval (steel white zinc plated)



No expansion/No Stress

No expansions stress with mechanical interlock between base material and anchor.

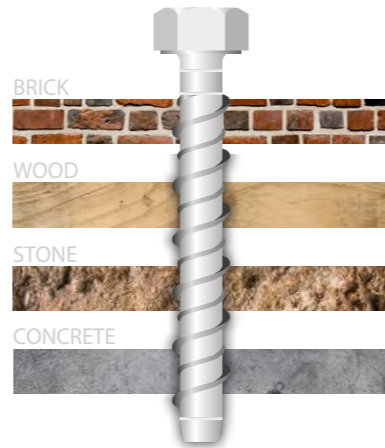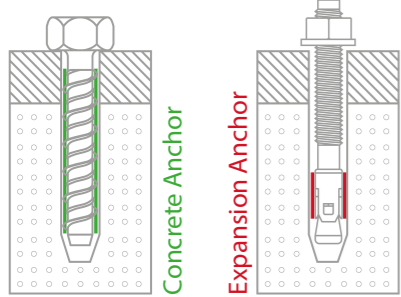

Product Code	Drill Hole Diameter (mm)	Anchor Thread Diameter (mm)	Anchor Length (mm)	Max.Fixture Thickness (mm)	Minimum Embedment Depth (mm)	Min.Hole Depth (mm)	Hex Head Dia A/F (mm)	Box Packaging
TAB06050F*	6	8	50	20	30	40	10	100
TAB06075F*	6	8	75	45	30	40	10	100
TAB06100F*	6	8	100	70	30	40	10	100
TAB06130F*	6	8	130	100	30	40	10	100
TAB06150F*	6	8	150	120	30	40	10	100
TAB08060F	8	10	60	20	40	50	12	100
TAB08075F	8	10	75	35	40	50	12	50
TAB08100F	8	10	100	60	40	50	12	50
TAB10060F	10	12	60	10	50	60	14	50
TAB10075F	10	12	75	25	50	60	14	50
TAB10100F	10	12	100	50	50	60	14	50
TAB10125F	10	12	125	75	50	60	14	50
TAB10140F	10	12	140	90	50	60	14	25
TAB10150F	10	12	150	100	50	60	14	25
TAB12075F	12	14	75	20	55	70	17	50
TAB12100F	12	14	100	45	55	70	17	25
TAB12120F	12	14	120	65	55	70	17	25
TAB12130F	12	14	130	75	55	70	17	25
TAB12150F	12	14	150	95	55	70	17	25

** Non ETA products

Anchor Bolt for Concrete - Rod Hanger (Steel white zinc plated)

Product Code	Drill Hole Diameter (mm)	Anchor Thread Diameter (mm)	Anchor Length (mm)	Inner Thread Diameter (mm)	Min.Hole Depth (mm)	Hex Head Dia A/F (mm)	Box Packaging
TAB6/35/8-10RH	6	75	55	8/10	50	13	100
TAB6/55/8-10RH	6	75	55	8/10	50	13	100



Anchor Bolt for Concrete - Countersunk Head (Bi-Metal Stainless Steel A4-316)

Product Code	Drill Hole Diameter (mm)	Anchor Thread Diameter (mm)	Anchor Length (mm)	Max.Fixture Thickness (mm)	Min.Hole Depth (mm)	Driver Type	Box Packaging
TAB06050CSS	6	8	50	20	40	T40	100
TAB06075CSS	6	8	75	45	40	T40	100
TAB06100CSS	6	8	100	70	40	T40	100



Anchor Bolt for Concrete - Hex Flange Head (Bi-Metal Stainless Steel A4-316)

Product Code	Drill Hole Diameter (mm)	Anchor Thread Diameter (mm)	Anchor Length (mm)	Max.Fixture Thickness (mm)	Min.Hole Depth (mm)	Hex Head Dia A/F (mm)	Box Packaging
TAB06050FSS	6	8	50	20	40	10	100
TAB06075FSS	6	8	75	45	40	10	100
TAB06100FSS	6	8	100	70	40	10	100
TAB08060FSS	8	10	60	20	55	13	100
TAB08075FSS	8	10	75	35	55	13	100
TAB08100FSS	8	10	100	60	55	13	100
TAB10075FSS	10	12	75	25	70	17	50
TAB10100FSS	10	12	100	50	70	17	50
TAB10150FSS	10	12	150	100	70	17	25
TAB12100FSS	12	14	100	40	85	19	50





MECHANICAL ANCHORS

MECHANICAL ANCHORS



Sleeve Anchor - Hex Nut
(Steel White Zinc Plated)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TS06026	6	26	5	25	100	1200
TS06040	6	40	8	30	100	1200
TS06060	6	60	28	30	100	1200
TS08040	8	40	8	40	100	1200
TS08065	8	65	30	40	50	600
TS08090	8	90	55	40	50	600
TS10040	10	40	6	40	50	600
TS10050	10	50	10	45	50	600
TS10075	10	75	35	45	50	400
TS10100	10	100	60	45	50	400
TS10125	10	125	85	45	50	400
TS12060	12	60	15	55	50	300
TS12075	12	75	20	55	50	300
TS12100	12	100	50	55	25	200
TS12125	12	125	75	55	25	200
TS16065	16	65	15	60	25	125
TS16110	16	110	55	60	10	50
TS16145	16	145	85	60	10	50
TS20080	20	80	20	65	10	50
TS20115	20	115	55	65	10	50
TS20160	20	160	100	65	10	50



Sleeve Anchor - Hex Bolt
(Steel White Zinc Plated)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TS08045H	8	45	8	40	100	1200
TS08070H	8	70	30	40	50	600
TS08090H	8	90	50	40	50	600
TS10055H	10	55	10	45	50	600
TS10080H	10	80	35	45	50	400
TS10100H	10	100	60	45	50	400
TS12065H	12	65	1	55	50	300
TS12080H	12	80	25	60	50	300
TS12100H	12	100	45	60	20	160
TS16075H	16	75	15	60	25	125
TS16110H	16	110	55	65	10	50



Sleeve Anchor - Hook and Eye Bolts
(Steel White Zinc Plated)

Product Code	Drill Hole Diameter (mm)	Inner Diameter (mm)	Type of Head	Min. Hole Depth (mm)	Box Packing	Outer Packing
TS 08045X	8	8	Eyelet	45	100	800
TS 08045K	8	11	Hook	45	100	800



Shield Anchor - Shield Only
(Steel White Zinc Plated)

R120 – 120 min fire resistance

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Thread Diameter (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TSA06	12	45	M6	50	200	800
TSA08	14	50	M8	55	100	400
TSA10	16	60	M10	65	100	400
TSA12	20	70	M12	85	50	200
TSA16	25	95	M16	125	25	100



Shield Anchor - Loosebolt
(Steel White Zinc Plated)

R120 – 120 min fire resistance

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TSA0610L	12	45	10	50	50	600
TSA0810L	14	50	10	55	50	450
TSA0825L	14	50	25	55	50	300
TSA1010L	16	60	10	65	50	200
TSA1025L	16	60	25	65	50	200
TSA1050L	16	60	50	65	50	200
TSA1210L	20	75	10	85	25	150
TSA1225L	20	75	25	85	25	100



Shield Anchor - Hook
(Steel White Zinc Plated)

Product Code	Thread Size (mm)	Drill Hole Diameter (mm)	Min. Hole depth (mm)	Anchor Length (mm)	Box Packing	Outer Packing
TSAH06	6	12	50	45	50	600
TSAH08	8	14	55	50	50	300
TSAH10	10	16	65	60	50	200
TSAH12	12	20	85	70	25	100



Shield Anchor - Eyebolt
(Steel White Zinc Plated)

Product Code	Thread Size (mm)	Drill Hole Diameter (mm)	Min. Hole depth (mm)	Anchor Length (mm)	Box Packing	Outer Packing
TSAE06	6	12	50	45	50	600
TSAE08	8	14	55	50	50	300
TSAE10	10	16	65	60	50	200
TSAE12	12	20	85	70	50	200





Drop-in Anchor - Lipped
(Steel White Zinc Plated)

Product Code	Thread Diameter (mm)	Drill Hole Diameter (mm)	Anchor Length (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TDA08L	8	10	30	33	100	2000
TDA10LS	10	12	30	33	50	1000
TDA10L	10	12	40	43	50	1000
TDA12L	12	16	50	54	50	500
TDA16L	16	20	65	70	25	200



Drop-in Anchor - Non Lipped
(Steel White Zinc Plated)

Product Code	Thread Diameter (mm)	Drill Hole Diameter (mm)	Anchor Length (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TDA06	6	8	25	25	100	2000
TDA08	8	10	30	33	100	2000
TDA10	10	12	40	43	50	1000
TDA12	12	16	50	54	50	500
TDA16	16	20	65	70	25	200
TDA20	20	25	80	85	25	100



Drop-In Anchor
(Stainless Steel A4-316)

Product Code	Thread Diameter (mm)	Drill Hole Diameter (mm)	Anchor Length (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TDA06SS	6	8	25	25	100	2000
TDA08SS	8	10	30	30	100	2000
TDA10SS	10	12	40	40	50	1000
TDA12SS	12	16	50	50	50	500
TDA16SS	16	20	65	70	25	200



Drop-In Anchor Setting Tool

Product Code	Sleeve Thread Diameter (mm)	For use with	Box Packing	Outer Packing
TDST06	6	TDA06, TDA06L, TDA06SS	1	-
TDST08	8	TDA08, TDA08L, TDA08SS	1	-
TDST10	10	TDA10, TDA10L, TDA10SS	1	-
TDST12	12	TDA12, TDA12L, TDA12SS	1	-
TDST16	16	TDA16, TDA16L, TDA16SS	1	-
TDST20	20	TDA20	1	-


Product Code	Description	Box Packing
TDST1025	M10 x 25 Soft Grip Setting Tool for Lipped Drop-In's	1
TDST1030	M10 x 30 Soft Grip Setting Tool for Lipped Drop-In's	1
TDST1250	M12 x 50 Soft Grip Setting Tool for Lipped Drop-In's	1

DesignFiX®

The Benchmark for Anchor Design Become a Real Anchor Professional

DesignFiX is an all-purpose anchor design program for manufacturers of fasteners for free distribution to their clients such as engineers, planners or craftsmen. By using the software, the clients can design mechanical and chemical heavy duty anchors under static loads and under the influence of earthquake.

Now available:
Design of post-installed rebar connections in reinforced concrete.

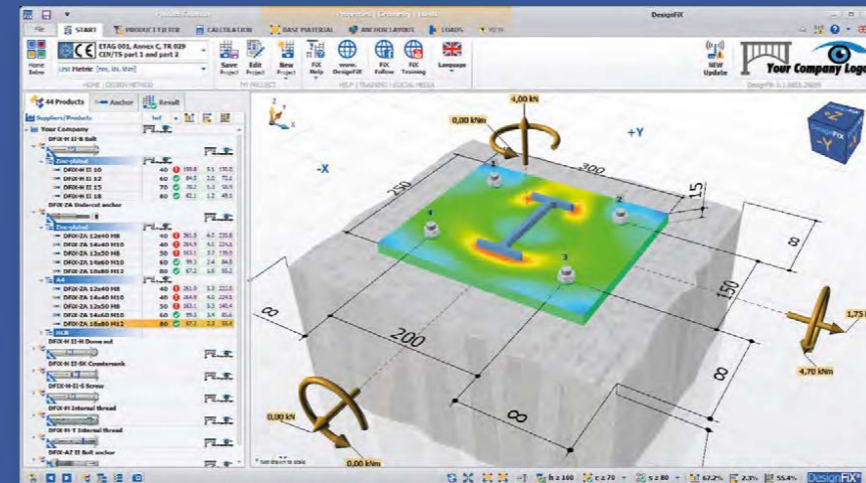



MEDIUM TO HEAVY LOADS

TCM 300/420 M PRO - Polyester

- Suitable for medium loads for non-critical applications.
- Fast working times for early loading in time sensitive applications.
- No styrene allows for use indoors and in enclosed spaces.
- Use in damp & wet environments and fixing holes.
- Extremely versatile in masonry, hollow, aerated concrete.
- Crack and gap filling repairs in concrete vertical or horizontal.
- 10:1 Resin available in a variety of cartridge types.




Product Code	Recommended Type of Substrate	Capacity (ml)	Box Packaging	For Use with:
TCM300M PRO	Concrete, Stone	300	12	TCM300MTP
TCM420M PRO	Concrete, Stone	420	12	TCM420MTP



POLYESTER UNIVERSAL
STYRENE FREE 10:1

Pure Epoxy - 3:1 & 1:1


- Suitable for high loads featuring large diameters and deep embedment.
- Longer working times make it suitable for large holes, and high temperatures.
- No shrinkage, good for large diameter fixings.
- Use in wet or flooded environments and fixing holes, or underwater.
- High durability, resistance to chemicals.
- Used for diamond drilled holes.
- Solvent free resin.
- Fixings in concrete, wood, or other high strength materials.



Product Code	Recommended Type of Substrate	Capacity (ml)	Box Packaging	For Use with:
TCM10PE	Concrete, Stone	400	10	TCM400MTP
TCM400PE**	Concrete, Stone	400	10	TCM400MTP
TCM600PE**	Concrete, Stone	400	10	TCM600MT
TCM385RE	Concrete, Stone	400	10	TCM585MT
TCM585RE	Concrete, Stone	400	10	TCM585MT



PURE EPOXY
STYRENE FREE 1:1 & 3:1



MEDIUM TO HEAVY LOADS

TCM 300/420 C PRO - Vinylster

- Suitable for high loads within standard annulus and embedments.
- Fast working times for early loading in time sensitive applications.
- No styrene allows for use indoors and in enclosed spaces.
- Use in wet or damp environments and fixing holes.
- Good durability formulation, resistance to chemicals.
- Used for studs and relatively small diameter rebar.
- 10:1 resin available in a variety of cartridge types.
- Fixings in concrete, wood, or other high strength materials.



Product Code	Recommended Type of Substrate	Capacity (ml)	Box Packaging	For Use with:
TCM300C PRO	Concrete, Stone	300	12	TCM300MTP
TCM420C PRO	Concrete, Stone	420	12	TCM420MTP



HYBRID VINYLESTER
ECO 10:1

TCM 300/420A - Arctic

- Suitable for medium loads for non-critical applications.
- Fast working times for early loading in time sensitive applications.
- Use in extremely cold environments and fixing holes.
- Extremely versatile in masonry, hollow, aerated concrete.
- Crack and gap filling repairs in concrete vertical or horizontal.
- 10:1 resin available in a variety of cartridge types



Product Code	Recommended Type of Substrate	Capacity (ml)	Box Packaging	For Use with:
TCM300 A	Concrete, Stone	300	12	TCM300MTP
TCM420 A	Concrete, Stone	420	12	TCM420MTP



HIGH AND MEDIUM LOADS



ARCTIC EPOXY
ACRYLATE 10:1

- Arctic working temperature up to -18C

HEAVY LOADS

TCM 420 PRO - Vinylster Styrene Free

- Suitable for high loads within standard annulus and embedments.
- Fast working times for early loading in time sensitive applications.
- No styrene allows for use indoors and in enclosed spaces.
- Use in wet or flooded environments and fixing holes.
- High durability, resistance to chemicals.
- Used for studs and rebar.
- 10:1 resin available in a variety of cartridge types.
- Fixings in concrete, wood, or other high strength materia



Product Code	Recommended Type of Substrate	Capacity (ml)	Box Packaging	For Use with:
TCM420 PRO	Concrete, Stone	420	12	TCM420MTP



VINYLESTER STYRENE FREE
FREE 10:1

Resin Injection Applicators



TCM400MTP



TCM420MTP



TCM300MTP

Product Code	For use with Cartridge capacity (ml)	Box Packing	Outer Packing
TCM400MTP	400	1	5
TCM420MTP	420	1	10
TCM300MTP	300	1	12

** TCM585MT & TCM600MT available on request



Glass Spin-In Capsules Epoxy Acrylate ETA Option 7 – Non Crack Approved

Product Code	Drill Hole Diameter (mm)	Thread Diameter (mm)	Capsule Length (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TSC08	10	8	110	80	10	500
TSC10	12	10	130	90	10	500
TSC12	14	12	160	110	10	200
TSC16	18	16	190	125	10	200
TSC20	25	20	260	170	6	60
TSC24	28	24	300	210	6	60

Hammer-In Capsules available on request



Chemical Stud Anchor with hexagon socket

(Steel White Zinc Plated)

Product Code	Drill Hole Diameter (mm)	Thread Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TCS08110	10	8	110	18	80	10	200
TCS10130	12	10	130	25	90	10	200
TCS12160	14	12	160	34	110	10	90
TCS16190	18	16	190	45	125	10	90
TCS20260	25	20	260	55	170	10	40
TCS24300	28	24	300	55	210	5	20



Glass Spin-In Capsules Vinylester Styrene Free- ETA Option 1 – Crack Approved

Product Code	Drill Hole Diameter (mm)	Thread Diameter (mm)	Capsule Length (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TSC08V	10	9	85	85	10	500
TSC10V	12	11	85	85	10	500
TSC12V	14	13	95	110	10	500
TSC14V	16	15	98	120	10	500
TSC16V	18	17	98	125	10	500
TSC20V	24	22	175	180	6	120
TSC22V	26	22	185	190	6	120
TSC24V	28	24	210	210	6	126
TSC27V	32	27	250	265	2	28
TSC30V	35	30	265	280	2	28



Chemical Stud Anchor

(Steel Hot-dip Galvanized)

Product Code	Drill Hole Diameter (mm)	Thread Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TCS08110G	10	8	110	18	80	10	200
TCS10130G	12	10	130	25	90	10	200
TCS12160G	14	12	160	34	110	10	90
TCS16190G	18	16	190	45	125	10	90
TCS20260G	25	20	260	55	170	10	40
TCS24300G	28	24	300	55	210	5	20



Glass Hammer-In Capsules Vinylester

Product Code	Drill Hole Diameter (mm)	Thread Diameter (mm)	Capsule Length (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
THC08V	10	9	85	85	10	500
THC10V	13	11	85	85	10	500
THC12V	15	13	95	110	10	500
THC14V	18	15	98	120	10	500
THC16V	20	17	98	125	10	500
THC20V	24	22	175	180	6	120
THC22V	26	22	185	190	6	120
THC24V	28	24	210	210	6	126
THC27V	32	27	250	265	2	28
THC30V	35	30	265	280	2	28

Chemical Stud Anchor - Hexagon

(Stainless Steel A4-316)

Product Code	Drill Hole Diameter (mm)	Thread Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TCS08110SS-A4	10	8	110	18	80	10	-
TCS10130SS-A4	12	10	130	25	90	10	-
TCS12160SS-A4	14	12	160	34	110	10	-
TCS16190SS-A4	18	16	190	45	125	10	-
TCS20260SS-A4	25	20	260	55	170	10	-
TCS24300SS-A4	28	24	300	55	210	5	-
TCS30380SS-A4	35	30	380	70	280	5	-





Internally threaded sleeve (Steel)

Product Code	Thread Diameter (mm)	Outer Diameter of Sleeve (mm)	Drill Hole Diameter (mm)	Sleeve Length (mm)	Box Packing	Outer Packing
TIS06	6	8	10	50	100	1000
TIS08	8	12	12	80	50	500
TIS10	10	14	16	80	50	250
TIS12	12	16	18	80	25	25



Debris Blow Out Pump

Product Code	Description	Box Packing
TBP01	Pump for hole cleaning	1



Hole Cleaning Brushes

Product Code	For use with Drill Hole Diameter (mm)	Working length of Brush (mm)	Overall Length (mm)	Description
TCB13	08-12	80	300	Steel Brush
TCB18	13-18	80	300	Steel Brush
TCB28	19-28	80	300	Steel Brush



Cartridge Nozzle

Product Code	Mixer Length (mm)	Description
TCN01	250	For use with 300/ 380/400/420 ml
TCN02	250	For use with 385/ 585 ml
TEN01	250	Mixer Extension



Perforated Sleeve (Nylon)

Product Code	Drill Hole Diameter (mm)	Hole Depth (mm)	Diameter/ Length of Tube (mm)	For use with Threaded Rods	Box Packing	Outer Packing
TPS01	12	55	12\50	M6-M8	50	2300
TPS02	16	90	15\85	M10-M12	20	1000
TPS03	16	140	15\135	M10-M12	20	1000
TPS04	22	90	20\85	M16	20	1000



Wire Mesh sleeve (Steel)

Product Code	Drill Hole Diameter (mm)	Outer Diameter of Sleeve (mm)	For use with Threaded Rods	Sleeve Length (mm)	Box Packing
TMS12	12	12	M6-M8	1000	1
TMS16	16	16	M10-M12	1000	1
TMS22	22	20	M12-M16	1000	1
TMS26	26	24	M20	1000	1

Nylon Plug without collar (no screw)

Product Code	Drill Hole Diameter (mm)	Plug Length (mm)	Screw Diameter (mm)	Screw Gauge	Min.Hole Depth (mm)	Box Packing	Outer Packing
TNP05	5	25	2.5 - 4.0	4-8	30	200	7200
TNP06	6	30	3.5 - 5.0	6-10	35	200	7200
TNP07	7	35	4.0 - 5.5	8-12	40	200	3600
TNP08	8	40	5.0 - 6.0	10-14	45	200	3600
TNP10	10	50	6.0 - 8.0	14-18	55	100	1800
TNP12	12	60	8.0 - 10.0	18-24	65	50	1800
TNP14	14	75	10.0 - 12.0	24-32	80	50	1800



Nylon Plug with collar (no screw)

Product Code	Drill Hole Diameter (mm)	Plug Length (mm)	Screw Diameter (mm)	Screw Gauge	Min.Hole Depth (mm)	Box Packing	Outer Packing
TNP05C	5	30	2.5 - 4.0	4-8	30	200	7200
TNP06C	6	35	3.5 - 5.0	6-10	35	200	7200
TNP07C	7	40	4.0 - 5.5	8-12	40	200	3600
TNP08C	8	45	5.0 - 6.0	10-14	45	200	3600
TNP10C	10	55	6.0 - 8.0	14-18	55	100	1800
TNP12C	12	65	8.0 - 10.0	18-24	65	50	1800
TNP14C	14	80	10.0 - 12.0	24-32	80	50	1800



Nylon Hammerscrews Countersunk BZP

Product Code	Drill Hole Diameter (mm)	Plug Length (mm)	Max Fixture Thickness (mm)	Min.Hole Depth (mm)	Screw Dia/ Length (mm)	Box Packing	Outer Packing
THS05025	5	25	1	28	3.50/27	200	7200
THS05030	5	30	5	35	3.50/32	200	7200
THS05040	5	40	15	45	3.50/43	200	3600
THS05050	5	50	25	55	3.50/55	200	3600
THS06040	6	40	10	45	3.85/43	200	3600
THS06050	6	50	20	55	3.85/53	100	1800
THS06060	6	60	30	65	3.85/63	100	1800
THS06080	6	80	50	85	3.85/83	100	1800
THS08045	8	45	5	50	4.85/50	100	1800
THS08060	8	60	20	65	4.85/65	100	1800
THS08080	8	80	40	85	4.85/85	100	1200
THS08100	8	100	60	105	4.85/105	100	1200
THS08120	8	120	80	125	4.85/125	100	1200
THS08140	8	140	100	145	4.85/145	100	1200



Stainless Steel Hammerscrews available on request.

Poly Hammerscrew Round Flat Head BZP

Product Code	Drill Hole Diameter (mm)	Plug Diameter (mm)	Plug Length (mm)	Box Packing	Outer Packing
THS06040P	6	6	40	100	-
THS06060P	6	6	60	100	-
THS06080P	6	6	80	100	-
THS08045P	8	8	45	100	-
THS08060P	8	8	60	100	-
THS08080P	8	8	80	100	-
THS08100P	8	8	100	100	-
THS08120P	8	8	120	100	-
THS08140P	8	8	140	100	-
THS08160P	8	8	160	50	-
THS10080P	10	10	80	50	-
THS10100P	10	10	100	50	-
THS10120P	10	10	120	50	-
THS10140P	10	10	140	50	-
THS10160P	10	10	160	50	-





Nylon Hammerscrews BZP

Product Code	Drill Hole Diameter (mm)	Plug Length (mm)	Max Fixture Thickness (mm)	Min.Hole Depth (mm)	Screw Dia/Length (mm)	Box Packing	Outer Packing
Mushroom Head							
THS06040M	6	40	10	45	3.85/43	200	3600
THS06060M	6	60	30	65	3.85/63	100	1800
THS06080M	6	80	50	85	3.85/83	100	1800
Round Flat Head							
THS05025F	5	25	-	28	3.50/27	200	7200
THS05030F	5	30	5	35	3.50/32	200	7200
THS05040F	5	40	15	45	3.50/43	200	3600
THS05050F	5	50	25	55	3.50/55	200	3600
THS06040F	6	40	10	45	3.85/43	200	3600
THS06050F	6	50	20	55	3.85/53	100	1800
THS06060F	6	60	30	65	3.85/63	100	1800
THS06080F	6	80	50	85	3.85/83	100	1800
THS08045F	8	45	5	50	4.85/50	100	1800
THS08060F	8	60	20	65	4.85/65	100	1800
THS08080F	8	80	40	85	4.85/85	100	1200
THS08100F	8	100	60	105	4.85/105	100	1200
THS08120F	8	120	80	125	4.85/125	100	1200
THS08140F	8	140	100	145	4.85/145	100	1200

Scaffold Restraint Bolt

(Galvanised Steel)

Product Code	Anchor Diameter (mm)	Anchor Length (mm)	Thread Length (mm)	Eye Diameter (mm)	Working Length (mm)	Box Packing	Outer Packing
TSRB12090	12	90	65	23	15	25	-
TSRB12120	12	120	65	23	45	25	-
TSRB12160	12	160	65	23	85	25	-
TSRB12190	12	190	65	23	115	25	-
TSRB12230	12	230	65	23	155	10	-
TSRB12300	12	300	65	23	225	10	-
TSRB12350	12	350	65	23	275	10	-
TSRB12400	12	400	65	23	325	10	-
TSRB12450	12	450	65	23	375	10	-

Sleeve for Scaffold Bolt

Product Code	Anchor Diameter (mm)	Anchor Length (mm)	Thread Length (mm)	Eye Diameter (mm)	Working Length (mm)	Box Packing	Outer Packing
TNP14075 L	14	85	75	23	-	50	1800
TNP14100 L	14	110	100	23	-	50	600
TNP14135 L	14	145	135	23	-	50	600
TNP14185 L	14	195	185	23	-	50	600

Nylon Frame Anchors Long Expansion C/Sunk Head

Product Code	Drill Hole Diameter (mm)	Plug Length (mm)	Max Fixture Thickness (mm)	Min.Hole Depth (mm)	Screw Dia/Length (mm)	Box Packing	Outer Packing
TNFA08100LE	8	100	30	80	5.50/105	100	900
TNFA08120LE	8	120	50	80	5.50/125	100	900
TNFA10080LE	10	80	10	80	7.00/85	50	450
TNFA10100LE	10	100	30	80	7.00/105	50	450
TNFA10115LE	10	115	45	80	7.00/120	50	450
TNFA10135LE	10	135	65	80	7.00/140	50	450
TNFA10160LE	10	160	90	80	7.00/165	50	300

Nylon Frame Anchors Long Expansion Hex Head

Product Code	Drill Hole Diameter (mm)	Plug Length (mm)	Max Fixture Thickness (mm)	Min.Hole Depth (mm)	Screw Dia/Length (mm)	Box Packing	Outer Packing
TNFA10080LEH	10	80	10	80	7.00/85	50	450
TNFA10100LEH	10	100	30	80	7.00/105	50	450
TNFA10115LEH	10	115	45	80	7.00/120	50	450
TNFA10135LEH	10	135	65	80	7.00/140	50	450
TNFA10160LEH	10	160	90	80	7.00/165	50	300
TNFA10180LEH	10	180	110	80	7.00/185	50	300

Sanitary Fixings (BZP screw, WC fixing, White and Chrome)

Product Code	Drill Hole Diameter (mm)	Plug Length (mm)	Screw Length (mm)	Screw Diameter (mm)	Cap Diameter (mm)	Polybag Packing	Outer Packing
TSFT68010W	10	50	80	6	10	1	100
TSFT68010C	10	50	80	6	10	1	100

Sanitary Fixings (BZP screw, Basin fixing)

Product Code	Drill Hole Diameter (mm)	Plug Length (mm)	Screw Length (mm)	Screw Diameter (mm)	Screw Cap Diameter (mm)	Polybag Packing	Outer Packing
TSFB08100	12	60	100	8	40	1	100
TSFB08120	12	60	120	8	40	1	100
TSFB08140	12	60	140	8	40	1	100
TSFB10120	14	70	120	10	40	1	100
TSFB10140	14	70	140	10	40	1	100

Sanitary Fixings (BZP screw, Urinal fixing)

Product Code	Drill Hole Diameter (mm)	Plug Length (mm)	Screw Length (mm)	Screw Diameter (mm)	Cap Diameter (mm)	Polybag Packing	Outer Packing
TSFU08100	12	60	100	8	40	1	100
TSFU08120	12	60	120	8	40	1	100
TSFU08140	12	60	140	8	40	1	100
TSFU10120	14	70	120	10	40	1	100
TSFU10140	14	70	140	10	40	1	100

** Chrome Head also available





All Purpose Frame Anchors - MULTI EXPANSION - ETA Option 7 – Non Crack Approved
(nylon, countersunk flat head, zinc plated)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Screw Diameter (mm)	Screw Length (mm)	Box Packing	Outer Packing
TNFAM08080	8	80	10	70	5,5	85	100	600
TNFAM08100	8	100	30	70	5,5	105	100	600
TNFAM08120	8	120	50	70	5,5	125	100	600
TNFAM08140	8	140	70	70	5,5	145	100	600
TNFAM10080	10	80	10	70	7,0	85	50	400
TNFAM10100	10	100	30	70	7,0	105	50	400
TNFAM10120	10	120	50	70	7,0	125	50	400
TNFAM10140	10	140	70	70	7,0	145	25	200
TNFAM10160	10	160	90	70	7,0	165	25	200
TNFAM10200	10	200	130	70	7,0	205	25	200
TNFAM10240	10	240	170	70	7,0	245	20	180
TNFAM10260	10	260	190	70	7,0	265	20	180

Ø 8mm socket PZ, Ø 10mm socket TORX40

Door / Window Frame Screw
(Steel White Zinc Plated)

Product Code	Screw Diameter (mm)	Screw Length (mm)	Max. Fixture Thickness (mm)	Drill Hole Diameter (mm)	Box Packing
TFCS75052	7,5	52	20	6	100
TFCS75072	7,5	72	40	6	100
TFCS75082	7,5	82	50	6	100
TFCS75092	7,5	92	60	6	100
TFCS75102	7,5	102	70	6	100
TFCS75112	7,5	112	80	6	100
TFCS75132	7,5	132	100	6	100
TFCS75152	7,5	152	120	6	100
TFCS75182	7,5	182	150	6	100
TFCS75202	7,5	202	170	6	100
TFCS75212	7,5	212	180	6	100

Tapscrew Blue Countersunk Hd

Product Code	Drill Hole Dia (mm)	Screw Dia (mm)	Screw Length (mm)	Max. Fixture Thickness (mm)	Min Hole Depth (mm)	Drive	Box Packing
TKS05032C	4	5	32	7	35	PH2	100
TKS05045C	4	5	45	20	35	PH2	100
TKS05070C	4	5	70	45	35	PH2	100
TKS05082C	4	5	82	57	35	PH3	100
TKS06025C	5	6	25	7	35	PH3	100
TKS06045C	5	6	45	20	35	PH3	100
TKS06057C	5	6	57	32	35	PH3	100
TKS06070C	5	6	70	45	35	PH3	100
TKS06100C	5	6	100	75	35	PH3	100
TKS06125C	5	6	125	100	35	PH3	100

All Purpose Frame Anchors - MULTI EXPANSION ETA Option 7 – Non Crack Approved
(nylon, hexagon head with washer, zinc plated)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Screw Diameter (mm)	Screw Length (mm)	Box Packing	Outer Packing
TNFAM10080F	10	80	10	70	7,0	85	50	400
TNFAM10100F	10	100	30	70	7,0	105	50	400
TNFAM10120F	10	120	50	70	7,0	125	25	200
TNFAM10140F	10	140	70	70	7,0	145	25	200
TNFAM10160F	10	160	90	70	7,0	165	25	200

All Purpose Frame Anchors - MULTI EXPANSION - ETA Option 7 – Non Crack Approved
(nylon, hexagon head, zinc plated)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Screw Diameter (mm)	Screw Length (mm)	Box Packing	Outer Packing
TNFAM10080H	10	80	10	70	7,0	85	50	400
TNFAM10100H	10	100	30	70	7,0	105	50	400
TNFAM10120H	10	120	50	70	7,0	125	50	400
TNFAM10140H	10	140	70	70	7,0	145	25	200
TNFAM10160H	10	160	90	70	7,0	165	25	250
TNFAM10200H	10	200	130	70	7,0	205	25	200
TNFAM10240H	10	240	170	70	7,0	245	20	180
TNFAM10260H	10	260	190	70	7,0	265	20	180

Tapscrew Blue Hex Hd

Product Code	Drill Hole Dia (mm)	Screw Dia (mm)	Screw Length (mm)	Max. Fixture Thickness (mm)	Min Hole Depth (mm)	Drive	Box Packing
TKS05032H	4	5	32	7	35	6.5	100
TKS05045H	4	5	45	20	35	6.5	100
TKS05057H	4	5	57	32	35	6.5	100
TKS06032H	5	6	32	7	35	8	100
TKS06045H	5	6	45	20	35	8	100
TKS06057H	5	6	57	32	35	8	100
TKS06070H	5	6	70	45	35	8	100
TKS06082H	5	6	82	57	35	8	100
TKS06100H	5	6	100	75	35	8	100

All Purpose Frame Anchors - MULTI EXPANSION - ETA Option 7 – Non Crack Approved
(nylon, countersunk flat head, stainless steel A4 (grade 316))

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Screw Diameter (mm)	Screw Length (mm)	Box Packing	Outer Packing
TNFAM10080SS**	10	80	10	70	7,0	85	50	400
TNFAM10100SS**	10	100	30	70	7,0	105	50	400
TNFAM10120SS**	10	120	50	70	7,0	125	50	400
TNFAM10140SS**	10	140	70	70	7,0	145	25	200
TNFAM10160SS**	10	160	90	70	7,0	165	25	200

**available upon request



Zamac Hammer-in Anchor

(ZnAl)

Product Code	Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TZH06030	6	30	8	22	100	1600
TZH06040	6	4	18	22	100	1600
TZH06050	6	50	28	22	100	1600
TZH06065	6	65	43	22	50	800



Metal Nail-In Anchor - ETA Part 6



Product Code	Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TMH06040	6	40	5	35	100	2000
TMH06070	6	70	30	40	100	1000



Anchor for Aerated Concrete

(Steel White Zinc Plated)

Product Code	Hole Diameter (mm)	Anchor Length (mm)	Screw Diameter (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TME 06032	7 - 9	32	3,5 - 4,0	38	200	3600
TME 08038	10 - 12	38	3,5 - 4,0	46	100	1800
TME 08060	10 - 12	60	4,5 - 5,0	68	100	900
TME 10060	12 - 14	60	6,0 - 8,0	68	50	900



Wirehanger

(Steel White Zinc Plated)

Product Code	Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TWH06055	6	55	-	40	100	2000



Drywall Anchors

(supplied with a screw)

Product Code	Screw Diameter (mm)	Screw Length (mm)	Max. Fixture Thickness (mm)	Anchor Length (mm)	Box Packing	Outer Packing
TDPA (Driva)	4	30	15	30	100	1000
TNPA38	4	38	15	45	100	1000



All Purpose Screw MultiFix

Product Code	Type	Hole Diameter (mm)	Anchor Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Box Packing
TMS6532ZC	Round Head	5	6.5	29	12	100



Steel Drywall Anchor

(Steel White Zinc Plated)

Product Code	Drill Hole Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Wall Thickness (mm)	Box Packing	Outer Packing
THW04025	8	25	8	0 - 5	200	3200
THW04045	8	45	16	8 - 16	100	1600
THW04050	8	50	17	16 - 23	100	1600
THW04065	8	65	20	18 - 32	100	1600
THW05045	10	45	17	6 - 13	100	1600
THW05060	10	60	26	8 - 16	100	1600
THW05070	10	70	30	16 - 32	100	800
THW06060	13	60	35	7 - 16	100	800
THW06070	13	70	30	16 - 32	100	800



THW Anchor Installation Tool

Product Code	Description	Box Packing
THWT01	Setting Tool for THW	1



Perforated Steel Straps

Product Code	Description	Tape Width (mm)	Tape Thickness (mm)	Tape Length (M)	Box Packing
TFP12	Steel mounting tape	12	0.7	10	10
TFP17	Steel mounting tape	17	0.7	10	10
TFP25	Steel mounting tape	25	0.7	10	5





Metal Insulation Anchor
(Carbon steel)



Product Reference	Anchor Diameter (mm)	Anchor Length (mm)	Min. Hole Depth (mm)	Drill Diameter (mm)	Head/Disc Diameter (mm)	Polybag Packing	Carton Packing
MIA08090	8	90	100	8	35	250	12000
MIA08110	8	110	120	8	35	250	12000
MIA08140	8	140	150	8	35	250	9000
MIA08170	8	170	180	8	35	250	9000
MIA08200	8	200	210	8	35	250	9000
MIA08250	8	250	260	8	35	125	6000
MIA08300	8	300	310	8	35	125	6000
MIA80W							



Metal Insulation Anchor
(Stainless Steel 1.4016)



Product Reference	Anchor Diameter (mm)	Anchor Length (mm)	Min. Hole Depth (mm)	Drill Diameter (mm)	Head/Disc Diameter (mm)	Polybag Packing	Carton Packing
MIA08090SS	8	90	100	8	35	250	12000
MIA08110SS	8	110	120	8	35	250	12000
MIA08140SS	8	140	150	8	35	250	9000
MIA08170SS	8	170	180	8	35	250	9000
MIA08200SS	8	200	210	8	35	250	9000
MIA08250SS	8	250	260	8	35	125	6000
MIA08300SS	8	300	310	8	35	125	6000
MIA80WSS							

Insulation Fixing - Short Expanding Zone
Intergrated expanding nail 60 mm Disc - Colours

Fixing into Concrete

Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Polybag Quantity	Outer Packing
TIA10080IENCC	10	80	50	100	1000
TIA10090IENCC	10	90	50	100	1000
TIA10100IENCC	10	100	50	100	1000
TIA10110IENCC	10	110	50	100	1000
TIA10120IENCC	10	120	50	100	1000
TIA10140IENCC	10	140	50	100	1000
TIA10160IENCC	10	160	50	100	1000
TIA10180IENCC	10	180	50	100	1000
TIA10200IENCC	10	200	50	100	1000
TIA10220IENCC	10	220	50	50	500

Insulation Fixing - Short Expanding Zone
Intergrated expanding nail, 60 mm Disc - White

Fixing into Concrete

Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Polybag Quantity	Outer Packing
TIA10080IENWC	10	80	50	100	1000
TIA10090IENWC	10	90	50	100	1000
TIA10100IENWC	10	100	50	100	1000
TIA10110IENWC	10	110	50	100	1000
TIA10120IENWC	10	120	50	100	1000
TIA10140IENWC	10	140	50	100	1000
TIA10160IENWC	10	160	50	100	1000
TIA10180IENWC	10	180	50	100	1000
TIA10200IENWC	10	200	50	100	1000
TIA10220IENWC	10	220	50	50	500

Insulation Fixing - Long Expanding Zone
Intergrated expanding nail 60 mm Disc - White

Fixing into Porotherm

Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Polybag Quantity	Outer Packing
TIA10140IENWP	10	140	80	200	-
TIA10160IENWP	10	160	80	200	-
TIA10180IENWP	10	180	80	200	-
TIA10200IENWP	10	200	80	200	-
TIA10220IENWP	10	220	80	100	-

Fixing into Concrete

Insulation Fixing - Short Expanding Zone
Insulation pin with Metal BZP expanding nail, 60mm Disc - White

Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Box Packing	Outer Packing
TIA10080MNWC	10	80	50	200	-
TIA10090MNWC	10	90	50	200	-
TIA10100MNWC	10	100	50	200	-
TIA10110MNWC	10	110	50	200	-
TIA10120MNWC	10	120	50	200	-
TIA10140MNWC	10	140	50	200	-
TIA10160MNWC	10	160	50	200	-
TIA10180MNWC	10	180	50	200	-
TIA10200MNWC	10	200	50	200	-
TIA10220MNWC	10	220	50	100	-

Fixing into Porotherm

Insulation Fixing - Long Expanding Zone
Insulation pin with Metal BZP expanding nail, 60mm Disc - White

Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Polybag Quantity	Outer Packing
TIA10140MNWP	10	140	80	100	-
TIA10160MNWP	10	160	80	100	-
TIA10180MNWP	10	180	80	100	-
TIA10200MNWP	10	200	80	100	-
TIA10220MNWP	10	220	80	50	-

Fixing into Concrete

Insulation Fixing - Short Expanding Zone
Insulation pin with Fibreglass expanding nail, 60mm Disc - White

Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Box Packing	Outer Packing
TIA10080FNWC	10	80	50	200	-
TIA10090FNWC	10	90	50	200	-
TIA10100FNWC	10	100	50	200	-
TIA10110FNWC	10	110	50	200	-
TIA10120FNWC	10	120	50	200	-
TIA10140FNWC	10	140	50	200	-
TIA10160FNWC	10	160	50	200	-
TIA10180FNWC	10	180	50	200	-
TIA10200FNWC	10	200	50	200	-
TIA10220FNWC	10	220	50	100	-

Fixing into Porotherm

Insulation Fixing - Long Expanding Zone
Insulation pin with Fibreglass expanding nail, 60mm Disc - White

Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Polybag Quantity	Outer Packing
TIA10140FNWP	10	140	80	200	-
TIA10160FNWP	10	160	80	200	-
TIA10180FNWP	10	180	80	200	-
TIA10200FNWP	10	200	80	200	-
TIA10220FNWP	10	220	80	100	-



Polymide Insulation Anchors

Insulation Anchor, Polymide Pin Short Expansion



NEW



Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Suitable for insulation thickness (mm)	Outer Packing
TIA10070PPSE	10	70	50	10-20	200
TIA10090PPSE	10	90	50	30-40	200
TIA10100PPSE	10	100	50	40-50	200
TIA10120PPSE	10	120	50	60-70	200
TIA10140PPSE	10	140	50	80-90	200
TIA10160PPSE	10	160	50	100-110	200
TIA10180PPSE	10	180	50	120-130	200
TIA10200PPSE	10	200	50	140-150	200
TIA10220PPSE	10	220	50	150-170	200
TIA10260PPSE	10	260	50	200-210	200

Polymide Insulation Anchors

Insulation Anchor, Polymide Pin Long Expansion



NEW



Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Suitable for insulation thickness (mm)	Outer Packing
TIA10140PPLE	10	140	80	50-60	200
TIA10160PPLE	10	160	80	70-80	200
TIA10180PPLE	10	180	80	90-100	200
TIA10200PPLE	10	200	80	110-120	200
TIA10220PPLE	10	220	80	130-140	200
TIA10260PPLE	10	260	80	170-180	100

Polymide Insulation Anchors

Insulation Anchor, Metal Pin Short Expansion



NEW



Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Suitable for insulation thickness (mm)	Outer Packing
TIA10120MPSE	10	120	50	60-70	200
TIA10140MPSE	10	140	50	80-90	200
TIA10160MPSE	10	160	50	100-110	200
TIA10180MPSE	10	180	50	120-130	200
TIA10200MPSE	10	200	50	140-150	200
TIA10220MPSE	10	220	50	150-170	200
TIA10260MPSE	10	260	50	200-210	100

Polymide Insulation Anchors

Insulation Anchor, Metal Pin Long Expansion



NEW



Product Reference	Drill Hole Diameter (mm)	Anchor Length (mm)	Anchor Depth (mm)	Suitable for insulation thickness (mm)	Outer Packing
TIA10140MPLE	10	140	80	50-60	200
TIA10160MPLE	10	160	80	70-80	200
TIA10180MPLE	10	180	80	90-100	200
TIA10200MPLE	10	200	80	110-120	200
TIA10220MPLE	10	220	80	130-140	200
TIA10260MPLE	10	260	80	170-180	100

Polymide Insulation washer 90mm



NEW

Product Reference	Washer Diameter (mm)
TIA140	140

Polymide Insulation Anchor



NEW

Product Reference	Anchor Diameter (mm)	Anchor Length	Drive	Box Packing	Outer Packing
TIFD50	25	50	T40	50	600
TIFD90	25	90	T41	25	300

SDS Plus XTC 4 Cutter Drill Bits

Product Code	Drill Diameter (mm)	Working Length (mm)	Overall Length (mm)
TXTC05110	5	50	110
TXTC06110	6	50	110
TXTC07110	7	50	110
TXTC08110	8	50	110
TXTC05160	5	100	160
TXTC06160	6	100	160
TXTC08160	8	100	160
TXTC10160	10	100	160
TXTC12160	12	100	160
TXTC16160	16	100	160
TXTC06210	6	150	210
TXTC08210	8	150	210
TXTC10210	10	150	210

Product Code	Drill Diameter (mm)	Working Length (mm)	Overall Length (mm)
TXTC12210	12	150	210
TXTC16210	16	150	210
TXTC06260	6	200	260
TXTC65260	6.5	200	260
TXTC08260	8	200	260
TXTC10260	10	200	260
TXTC12260	12	200	260
TXTC14260	14	200	260
TXTC16260	16	200	260
TXTC08310	8	250	310
TXTC10310	10	250	310
TXTC12310	12	250	310
TXTC14310	14	250	310
TXTC16310	16	250	310



NEW

Kit of SDS Plus XTC 4 Cutter Drill Bits

Product Code	Drill Diameter (mm)	Working Length (mm)	Overall Length (mm)
P10TXTC05110	5	50	110
P10TXTC06110	6	50	110
P10TXTC07110	7	50	110
P10TXTC08110	8	50	110
P10TXTC05160	5	100	160
P10TXTC06160	6	100	160
P10TXTC08160	8	100	160

Product Code	Drill Diameter (mm)	Working Length (mm)	Overall Length (mm)
P10TXTC10160	10	100	160
P10TXTC12160	12	100	160
P10TXTC06210	6	150	210
P10TXTC08210	8	150	210
P10TXTC10210	10	150	210
P10TXTC12210	12	150	210

*The kit includes 10 drill bits.



NEW

XTC SDS MAX Drill Bits

Product Code	Drill Diameter (mm)	Working Length (mm)	Overall Length (mm)
TCMU16690	16	550	690
TCMU16920	16	780	920
TCMU18690	18	550	690
TCMU18920	18	780	920
TCMU20690	20	550	690
TCMU20920	20	780	920
TCMU22340	22	200	340
TCMU22540	22	400	540
TCMU24340	24	200	340
TCMU24540	24	400	540
TCMU24690	24	550	690
TCMU25340	25	200	340
TCMU25540	25	400	540

Product Code	Drill Diameter (mm)	Working Length (mm)	Overall Length (mm)
TCMU26340	26	200	340
TCMU26540	26	400	540
TCMU28340	28	200	340
TCMU28690	28	550	690
TCMU28920	28	780	920
TCMU30540	30	400	540
TCMU32540	32	400	540
TCMU35540	35	400	540
TCMU36540	36	400	540
TCMU36920	36	780	920
TCMU38540	38	400	540
TCMU40690	40	550	690
TCMU40920	40	780	920
TCMU42690	42	550	690
TCMU42920	42	780	920



NEW





SDS-Plus Chisels

Product Code	Description/Dimensions (mm)	Overall Length (mm)
TPPC12250	Pointed Ø12x250	250
TPPC14250	Pointed Ø14x250	250
TPFC20250	Flat Chisel 20mm	250
TPFC40250	Flat Chisel 40mm	200
TCPC22250	Concrete Chasing 22mm	250
TPAB40200	Angle Chisel 40mm	200



SDS MAX Chisels

Product Code	Description/Dimensions (mm)	Overall Length (mm)
TMPC18280	Pointed Ø18x280	280
TMPC18400	Pointed Ø18x400	400
TMFC24280	Flat Chisel 24mm	280
TMFC24400	Flat Chisel 24mm	400
TMFC50360	Flat Chisel 50mm	360
TMFC80300	Flat Chisel 80mm	300
TMFC115350	Flat Chisel 115mm	350
TCMC26300	Concrete Chasing Chisel 26mm	300
TMAB50300	Flat Chisel Crouched 50mm	300
THBH1645	Bush Hammer Head	280

Flat Ultra-Thin Abrasive Wheels for Cutting of Steel

Product Code	Disc Dimensions D x H x d [mm]	Maximum Operating Speed (rev/min)	Colour label	Box Packing	Weight (kg/pcs)
TAMF125/1.0C	125x1.0x22.2	12200	Blue	25	0,03
TAMF125/1.6C	125x1.6x22.2	12200	Blue	25	0,04
TAMF230/2.0C	230x2.0x22.2	6600	Blue	25	0,183



Flat Abrasive Wheels for Cutting of Stainless and Acid Resistant Steel, INOX

Product Code	Disc Dimensions D x H x d [mm]	Maximum Operating Speed (rev/min)	Colour label	Box Packing	Weight (kg/pcs)
TSSF125/1.0CMM	125x1.0x22.2	12200	Silver	25	0,03
TSSF230/2.0CMM	230x2.0x22.2	6600	Silver	25	0,186




Depressed-Centre Abrasive Wheels for Grinding Steel

Product Code	Disc Dimensions D x H x d [mm]	Maximum Operating Speed (rev/min)	Colour label	Box Packing	Weight (kg/pcs)
TAMDC125/6.0G	125x6.0x22.2	12200	Red	10	0,162



Diamond Cutting Discs

Product Code	Product Type	Dimensions mm	Packaging
TDDL125	Laser 125mm	125/22,5	1
TDDL230	Laser 230mm	230/22,5	1
TDDT125	Turbo 125mm	125/22,5	1
TDDT230	Turbo 230mm	230/22,5	1





TRUTEK BRANDING


Trutek offers a wide range of POS material to maximise branding and potential sales, wherever the requirement. A complete SOLUTION.

HIGH END PACKAGING

Trutek's new branded packaging emphasises the quality and reliability of its products. Strong presence and clear product selection is the RESULT.



TRUTEK POWER TOOLS

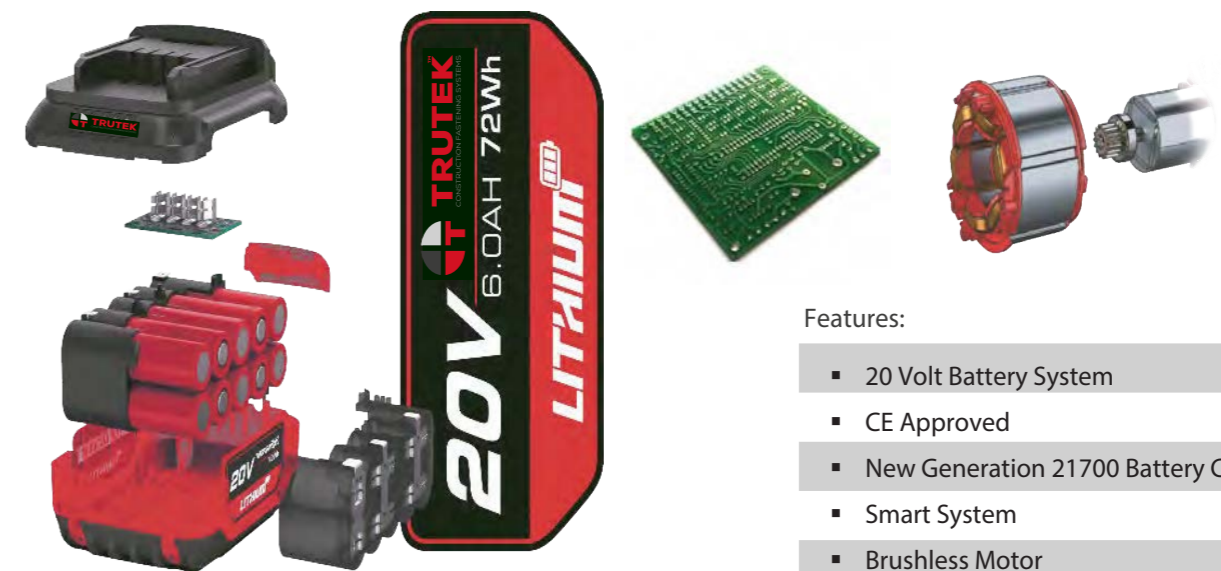

Features:

- 20 Volt Battery System
- CE Approved
- New Generation 21700 Battery Cell
- Smart System
- Brushless Motor



TRUTEKTM
CONSTRUCTION FASTENING SYSTEMS



HEAD OFFICE

Trutek Fastening Systems UK Ltd
Ighten Road
Burnley
Lancashire
BB12 0HP

Email: Vyron.Varnavides@trutekfixings.co.uk

tel: +44 (0) 800 0129 030
mob: +44 (0) 7555 460 595

www.trutekfixings.co.uk

TUKPG2022

